


## SPROCKETED HUB ROLLER QUOTATION WORKSHEET

Company: \_\_\_\_\_ Date: \_\_\_\_\_  
 Contact: \_\_\_\_\_ Quote Due: \_\_\_\_\_ Desired Delivery: \_\_\_\_\_  
 Phone No.: \_\_\_\_\_ Contact Email: \_\_\_\_\_ State: \_\_\_\_\_  
 Ultimation Sales Contact: \_\_\_\_\_ Quote #: \_\_\_\_\_

Quantity: \_\_\_\_\_ Axle Length: \_\_\_\_\_ (or Standard)  
 Between Frame Width (BF): \_\_\_\_\_ Axle Retention: \_\_\_\_\_  
 Overall Cone (OAC) (if roller is not in frame): \_\_\_\_\_ Type of Bearing: \_\_\_\_\_  
 Large Tube Diameter: \_\_\_\_\_ Sprocket Size: \_\_\_\_\_  
 Wall Thickness (Gauge): \_\_\_\_\_ Load Capacity Required: \_\_\_\_\_  
 Axle Size: \_\_\_\_\_ (Hex or Round)

Note: Between Frame (BF) is the distance between the frames of the conveyor. The BF measurement is needed to ensure proper fit into the conveyor. If the roller is not in the conveyor provide the Overall Cone, the length of the roller from bearing tip to bearing tip (See our Roller Measurement Guide for more information). Utilize the drawing below to depict more detailed specifications.

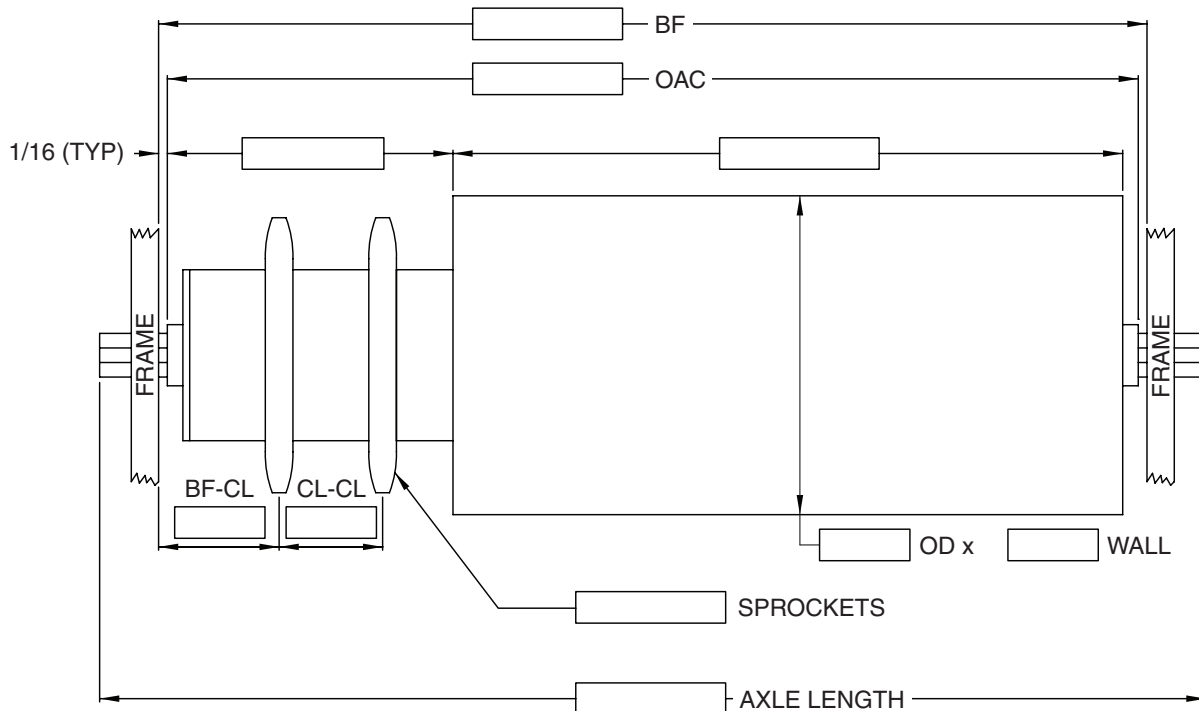

Proposal Drawing Required:  Yes  No